



AGALED/2/CCT/M3



Features

Compact IP65 LED Downlight which out performs twin 18W and 26W PLC lamp variants

One product provides both 3000K and 4000K colour temperature options

Cut-out dimensions suitable to replace most PLC downlights

Fitting and driver pre-wired with ST18 connectors

Faceted reflector and optical fresnel lens provides outstanding performance, uniformity and glare control

Removable twist on, twist off bezel provides option of utilising alternative bezel and drop glass accessories

Dimmable and Emergency options

LED lifespan L70 50,000 hours

General Information

Lamp Type	LED
Colour / Finish	White
Emergency	Yes
IP Rating	IP65
Class Protection	2
Bathroom Zone	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	226
Height (mm)	62.5
Accessories	AGPL/DG1/W, AGPL/DG3/W


Technical Information

Wattage	20W
Lumens Delivered	2250lm(Cool White), 2230lm(Warm White)
Lm/W	112lm(Cool White), 112lm(Warm White)
CRI	Ra 80
CCT	3000/4000K
Input	230V
Hertz	50/60Hz
Operating Temp	-20°C to 40°C

Technical Data - ETIM - Downlight/spot/floodlight (EC001744)

Suitable for surface mounting	No
Suitable for built-in mounting	Yes
Suitable for wall mounting	No
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for traverse mounting	No
Suitable for pedestal/floor mounting	No
Suitable for light-track mounting	No
Adjustability	Not adjustable
With movement sensor	No
With light sensor	No
With light source	Yes
Suitable for number of lamps	1
Colour housing	White
Nominal voltage	230-230 V
Control gear included	Yes
No dim function	Yes
Light distributor	Reflector
Degree of protection (IP)	IP65
Protection class	II
Max. system power	20 W
Colour of light	White
Colour temperature	3000-4000 K
Colour rendering index CRI	80-89
Luminous flux	2230-2250 lm

Lamp efficacy	112 lm/W
Width	226 mm
Height/depth	62.5 mm

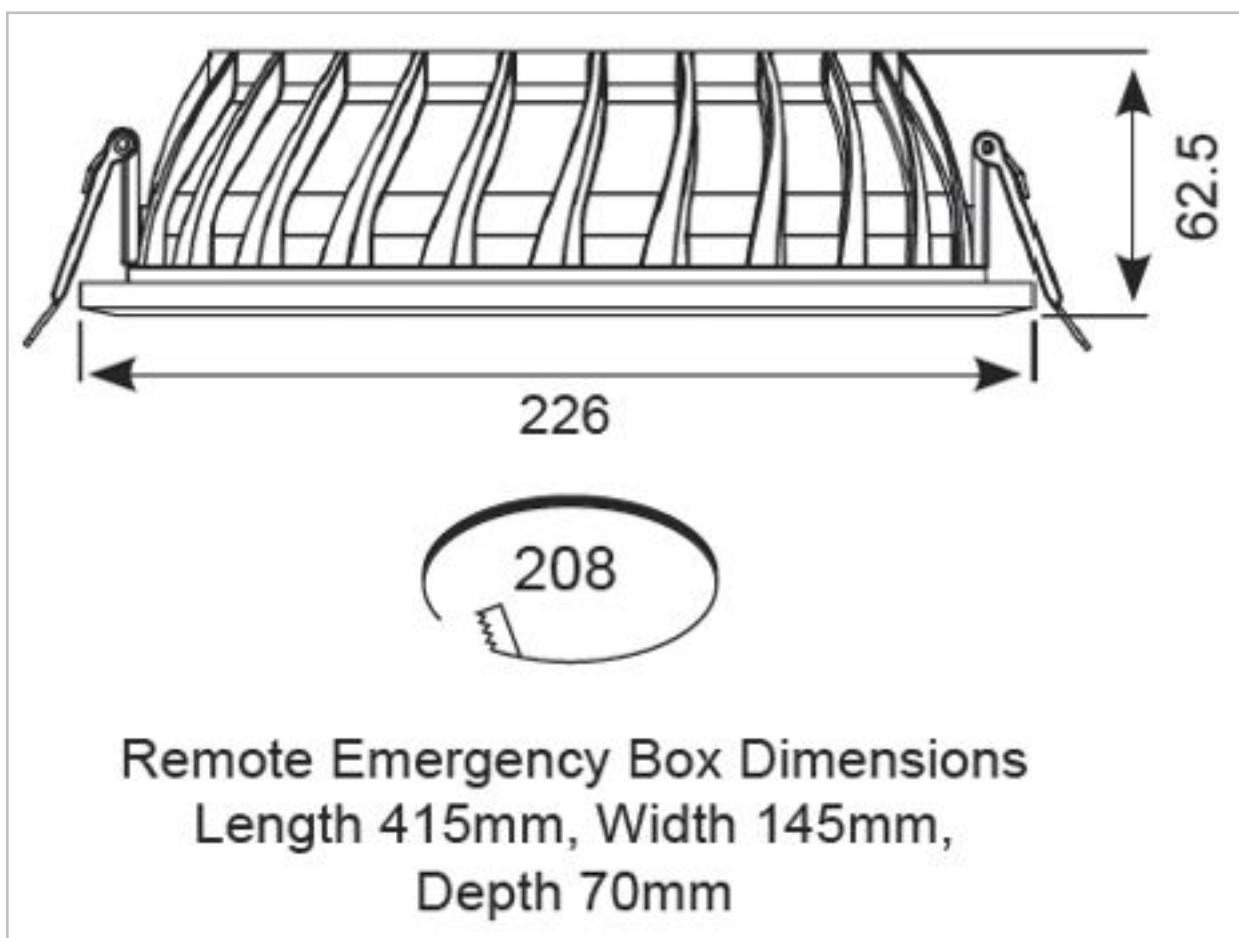

Datasheet generated from <https://onetimepim.com> last updated Tuesday, December 1, 2020 9:47:17 AM